

INTRODUCTION :

HISOL-PRN is Non-Flammable, solvent based, non-viscous Paint stripper which is effective for the removal of many modern paints finishes from metal surfaces such as automobile parts, fixtures or any parts to be reworked or repainted. H

ISOL PRN will not cause or promote attack on metal and contains no phenolic materials.


HISOL-PRN is formulated for use either by immersion, or by brush, swab or airless spray application.

OPERATING DATA:

- It is used in neat form without any dilution, as supplied at room temperature.
- When used by immersion process, tanks will need to be covered except during loading or unloading the bath tank as the product is volatile.

OPERATIONAL RECOMMENDATIONS:

3. HISOL-PRN is recommended for removal of most paint formulations. HISOL-PRN will not attack brass, copper, cadmium, aluminum, magnesium, zinc or steel surfaces.
4. Depending on the type of finish being stripped, some finishes may be partially dissolved or the finish-film bond may be loosened; in either case, thoroughly clean the surface of digested or loosened finish by use of a water-jet.

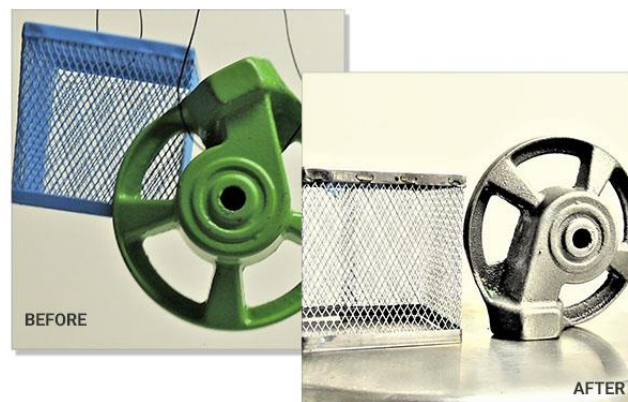

1. Provide adequate ventilation in the working area. Avoid prolonged inhalation of mist or vapours which may cause irritation or injury or dizziness.
2. The tanks, handling racks, baskets, etc., used with HISOL-PRN may be constructed of mild steel or stainless steel